- 6 x 9" HOP Woofer Cone
- 2-5/8" Paper Cone Midrange
- Dual Balanced Drive Tweeters
- New Xplōd® design
- 260W max input power (60W RMS)
- Flexible mounting options
- 4Ω Voice Coil

- Indicates step-up

XS-V6942
4-Way Speaker

Specifications

Speaker	Coaxial 4-way: Woofer 16.6 x 23.9 cm (6 5/8 x 9 1/2 in.) cone type Midrange 6.6 cm (2 5/8 in.) cone type Tweeter 2.5 cm (1 in.) balance dome type Super tweeter 2.5 cm (1 in.) balance dome type
Maximum input power	260 watts
Rated input power	60 watts
Impedance	4 ohms
Sensitivity	91 dB/W/m
Frequency response	28 – 28,000 Hz
Mass	Approx. 1,350 g (2 lb. 15 oz.) per speaker

Parts

Part No.	Description
1-825-061-11	SPEAKER (6inch x 9inch) (L)
1-825-061-21	SPEAKER (6inch x 9inch) (R)
3-239-703-11	MANUAL, INSTRUCTION (ENGLISH,FRENCH, SPANISH,TRADITIONAL CHINESE)
3-240-345-01	PLATE, TOP
X-3381-766-1	NET ASSY, GRILLE (x2)
1-574-318-71	CORD (WITH TERMINAL) (L) (WHITE)
1-574-318-81	CORD (WITH TERMINAL) (R) (GRAY)
3-240-189-01	SCREW (+P4 X 35), SPECIAL (x8)
3-392-870-01	NUT, SPEED (x8)

Design and Specifications subject to change without notice.

SONY®

XS-V6942
4-Way Speaker

Dimensions

Unit: mm (in.)

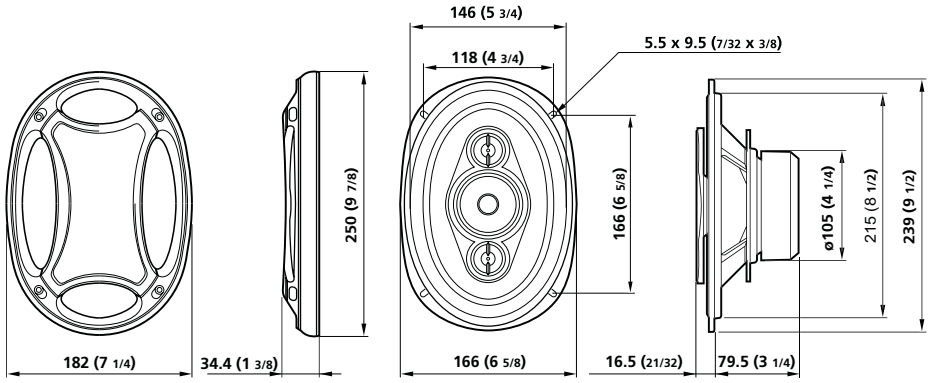

Design and Specifications subject to change without notice.

SONY